

MLC203 E Dynamometer Hydraulic Press Spoke Load Cell 300 TON

Model:MLC203E

Catalog: Push Button Load Cells

Rated load: 50kg, 500, 5000kg, 100t, 200t, 300t


Overload: 150%/200%

Material: alloy steel, stainless steel, alloy aluminum


Applicable to: dynamometer, hydraulic press, hopper scale, packaging scale, platform scale, dynamic weighing system




INST A


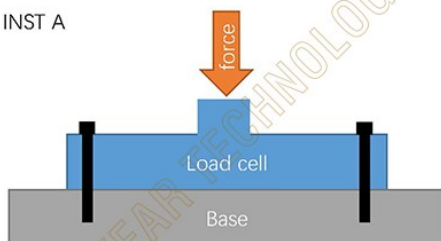


INST B


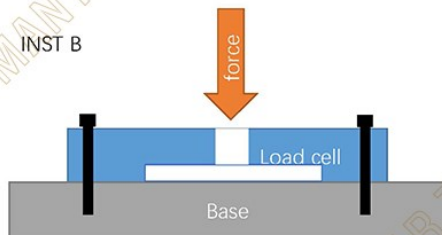


INST C

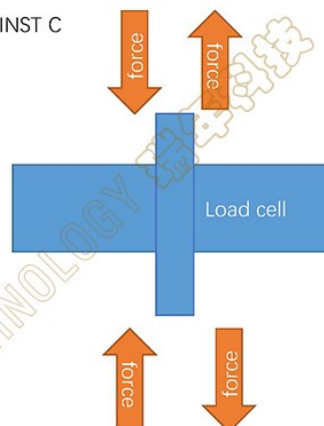

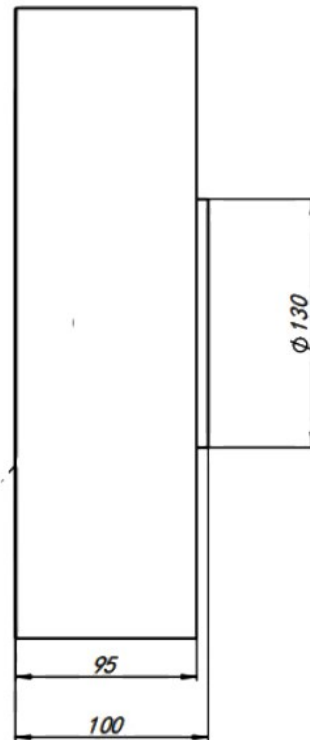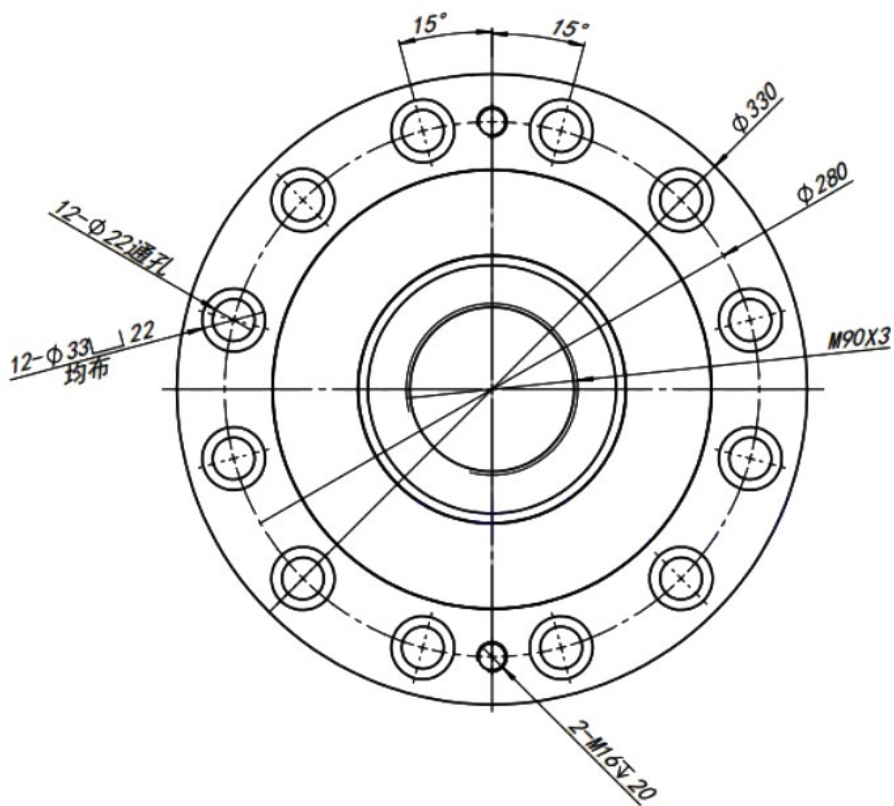

100t外形尺寸

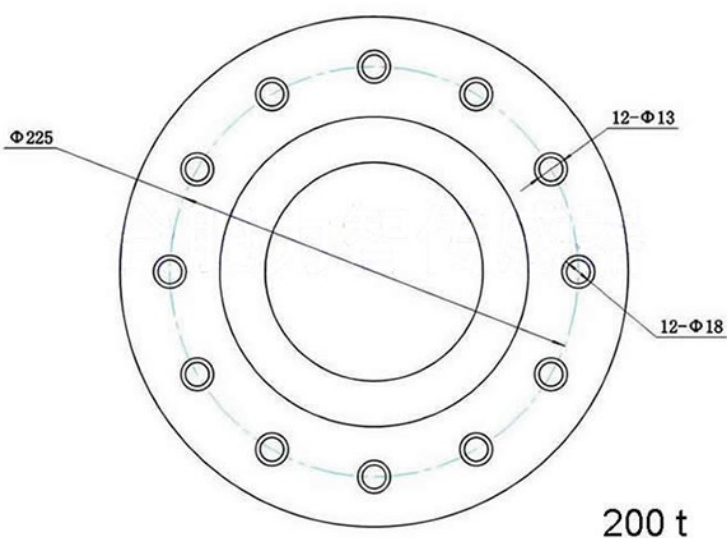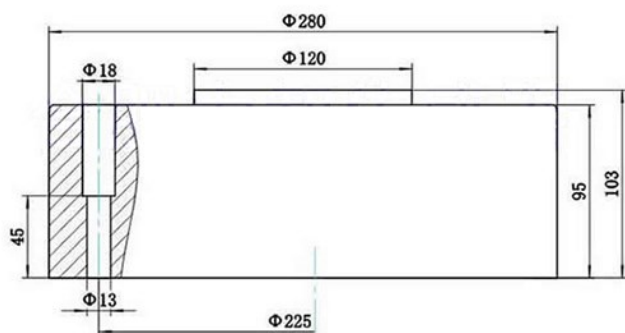

Technical specifications

Comprehensive error:	0.05 % FS	Output resistance:	700/1400 ±5Ω
Rated output:	2.0±0.05mv/v	Insulation resistance:	≥5000MΩ(100VDC)
Nonlinearity:	0.0 5 %FS	Operating Voltage:	5 ~12VDC
Lag:	0.0 5 %FS	Compensation temperature:	-10 ~+ 60 °C
Repeatability:	0.0 5 %FS	Operating temperature:	-20~+ 80 °C
Creep:	0.0 5 %FS/10Min	Effect of Temp. on zero point:	0.05%FS/10 °C
Zero Balance:	±1%FS	Effect of Temp. on sensitivity:	0.05%FS/10 °C
Input resistance:	700/1400 ±10Ω	Protection level:	IP66 & IP68